


Coated Grades for Cast Iron

AC4010K / AC4015K / AC4020K


For Ultra-High Speed Machining of Gray Cast Iron to Heavy Interrupted Machining
of High-Strength Ductile Cast Iron

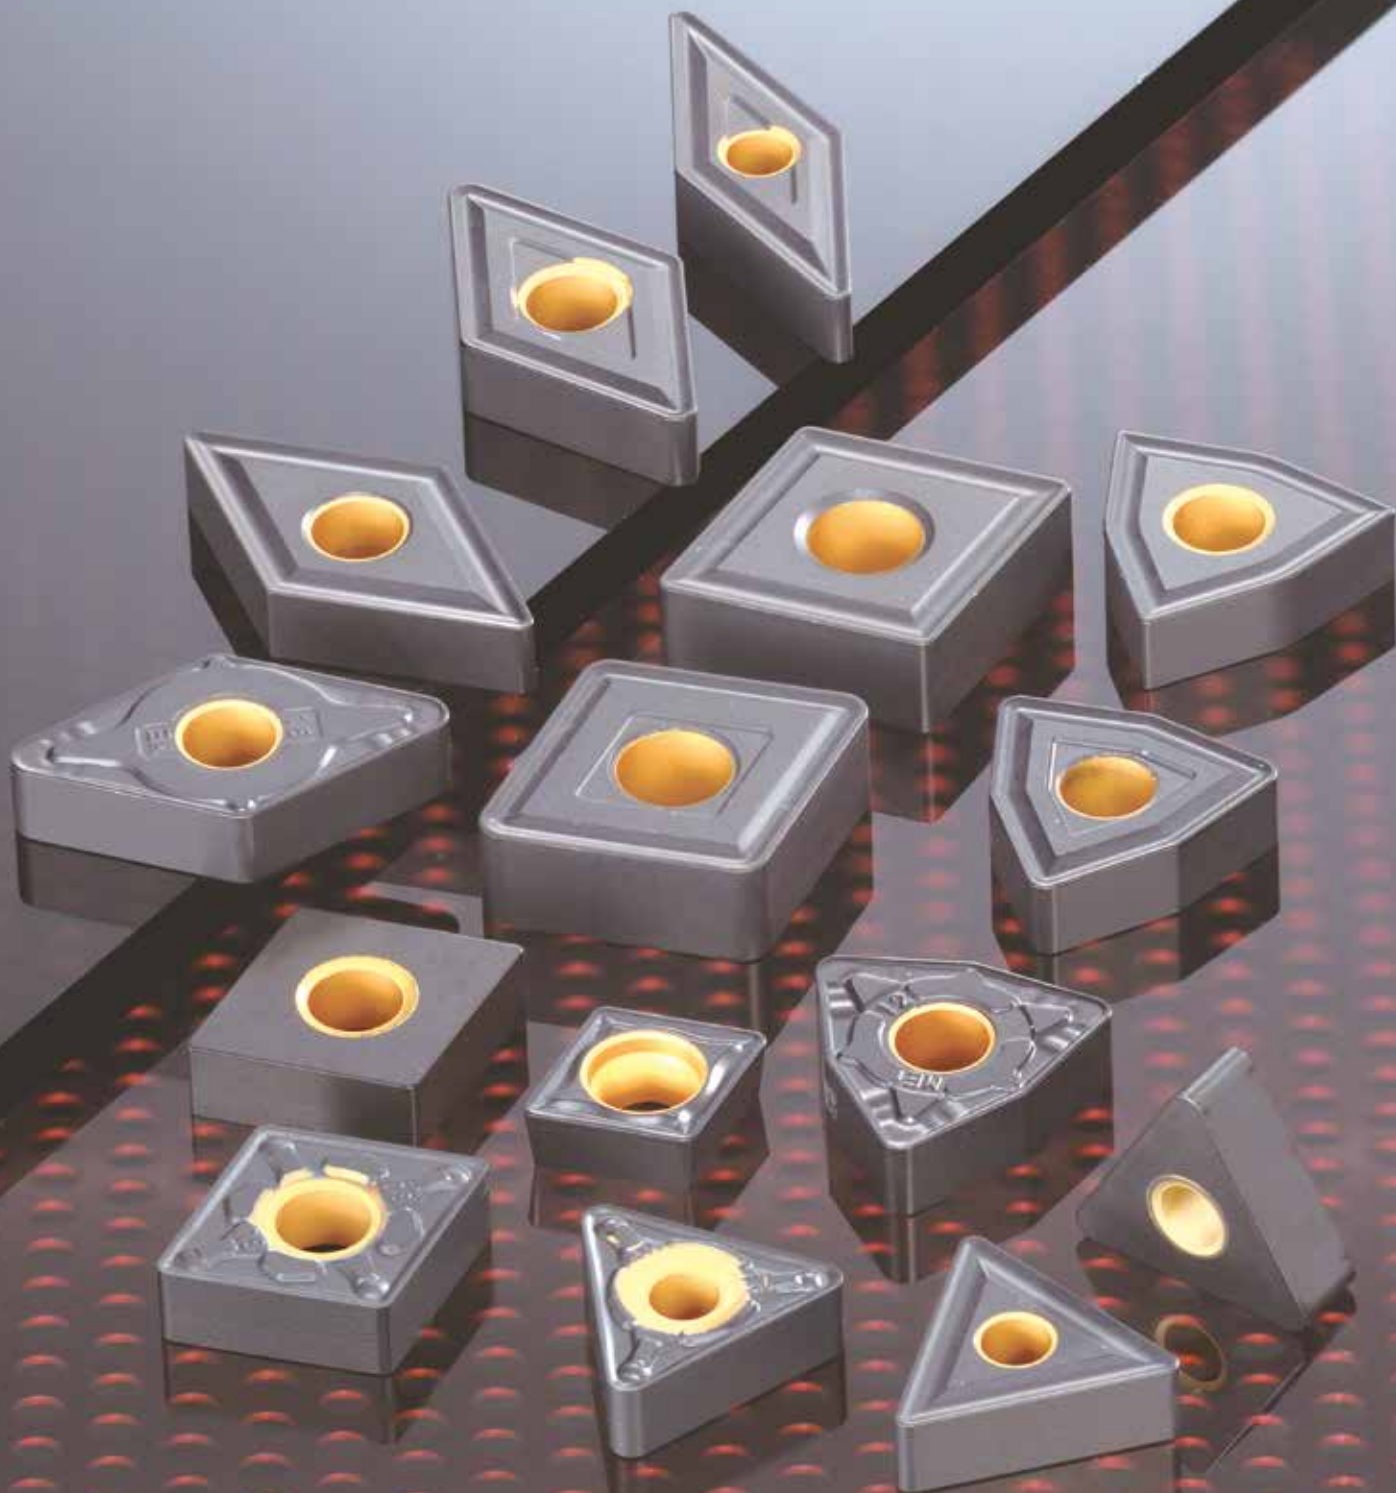

For Cast Iron Turning

AC4010K / AC4015K

Application Range

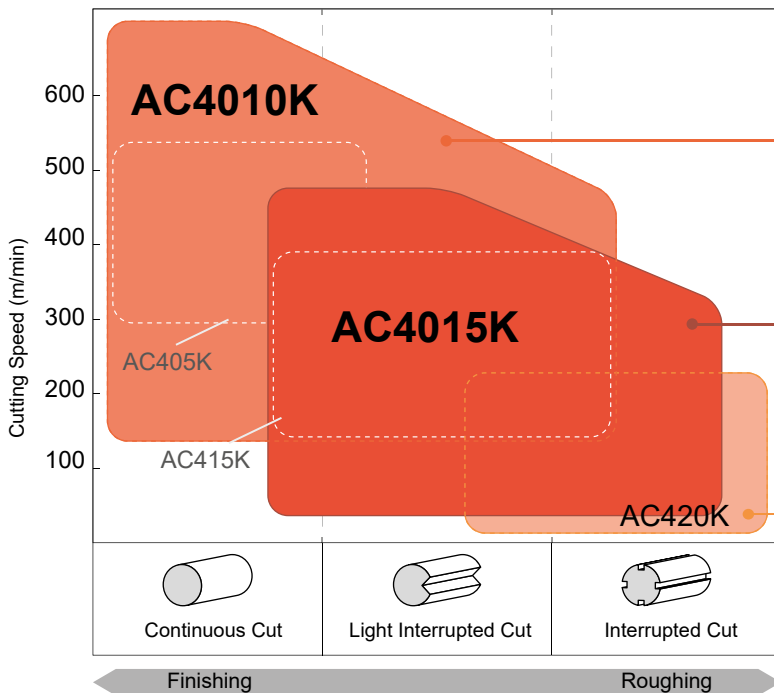


AC4010K
1st recommended grade for gray cast iron. Ultra thick coating allows for ultra-high speed machining ($v_c = 700$ m/min)

AC4015K
1st recommended grade for ductile cast iron. High adhesion, high-strength coating provides longer and stable tool life.


AC420K
Excellent fracture resistance in heavy interrupted and unstable machining.

Features

AC4010K / AC4015K





Newly developed high adhesion technology, crystal orientation control technology and residual stress control technology for longer and stable tool life with various cast irons - from gray cast iron and ordinary cast iron (GG) to high-strength ductile cast iron (GGG).

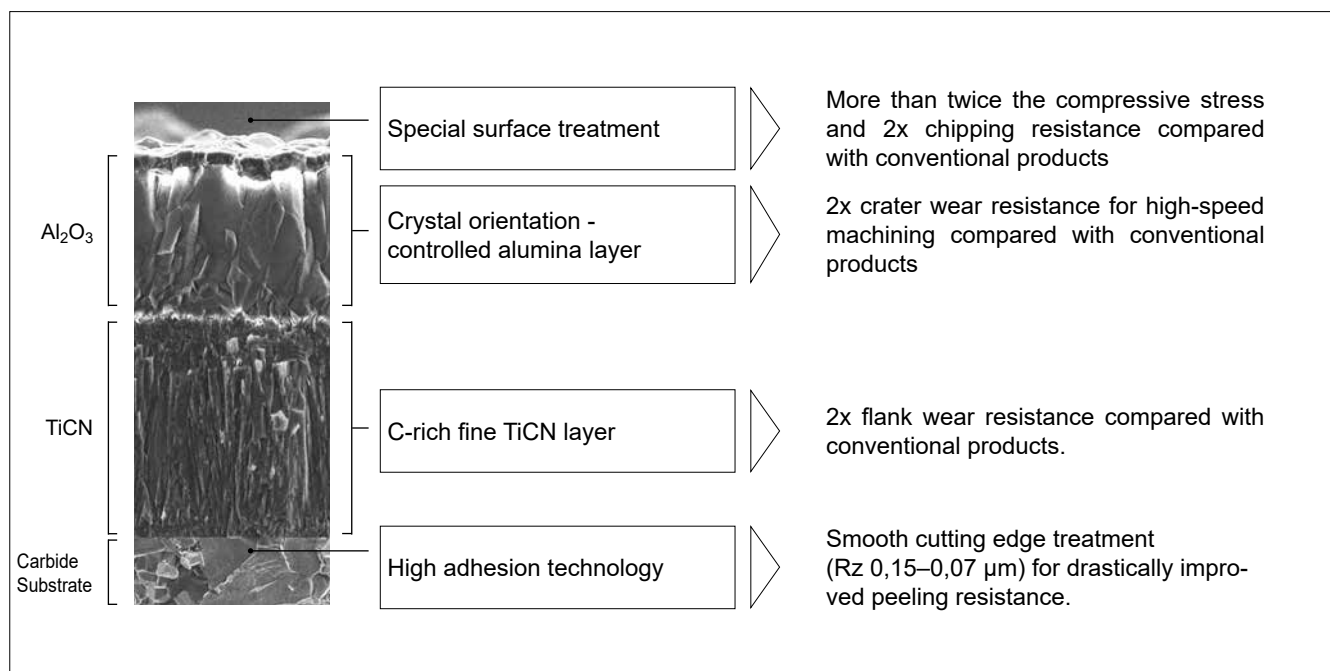

Cutting Performance

Wear Resistance, Gray Cast Iron (GG)

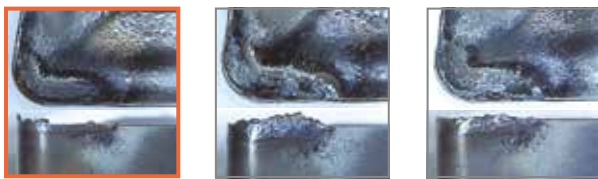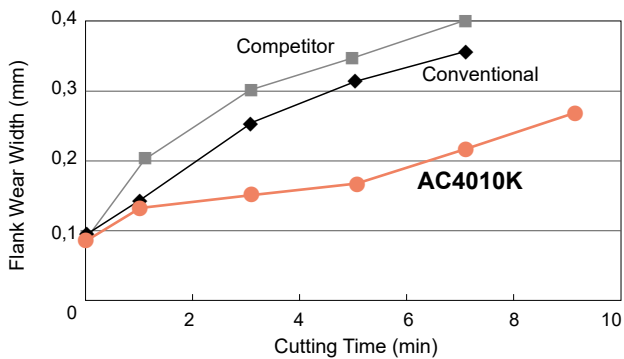



NGZ AC4010K

Conventional

Competitor

Work Material: GG-25 Continuous
 Insert: CNMG120408
 Cutting Conditions: $v_c = 600$ m/min, $f = 0,4$ mm/rev, $a_p = 2,0$ mm, dry

Wear Resistance, Ductile Cast Iron (GGG)

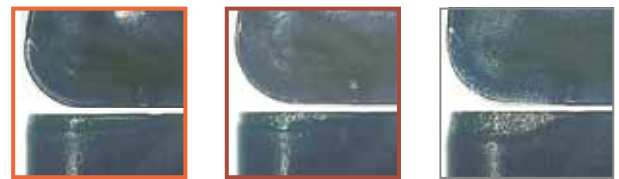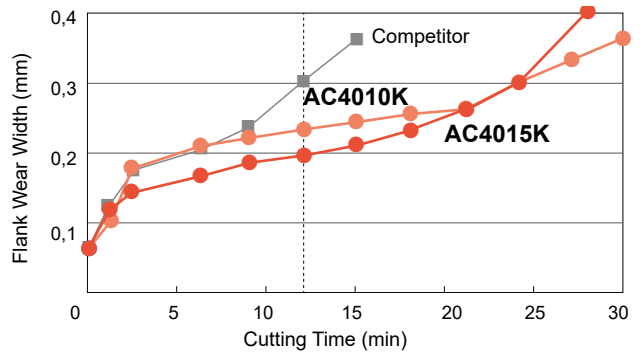


After 12 min
NGZ AC4010K

After 12 min
NGZ AC4015K

After 12 min
Competitor


Work Material: GGG-70 Continuous
 Insert: CNMG120408
 Cutting Conditions: $v_c = 140$ m/min, $f = 0,3$ mm/rev, $a_p = 1,5$ mm, wet

Chipping Resistance, Gray Cast Iron (GG)

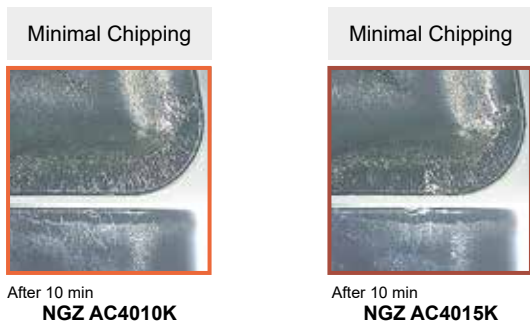

After 10 min
NGZ AC4010K

After 10 min
NGZ AC4015K


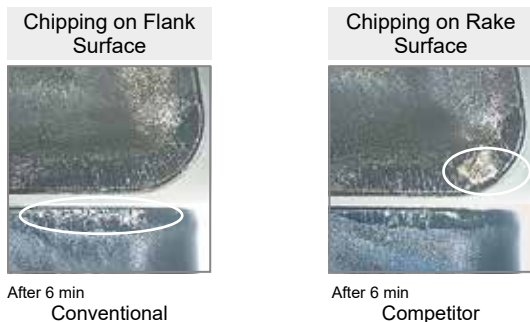


After 6 min
Conventional

After 6 min
Competitor

Work Material: GG-25 Interrupted
 Insert: CNMG120408
 Cutting Conditions: $v_c = 400$ m/min, $f = 0,3$ mm/rev, $a_p = 2,0$ mm, wet


Chipping Resistance, Ductile Cast Iron (GGG)

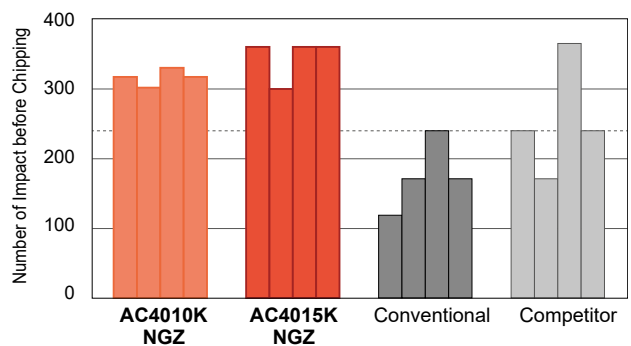


After 4 min
NGZ AC4010K



After 4 min
NGZ AC4015K



After 4 min
Conventional




After 4 min
Competitor

Work Material: GGG-40,3 Interrupted
 Insert: CNMG120408
 Cutting Conditions: $v_c = 450$ m/min, $f = 0,3$ mm/rev, $a_p = 1,5$ mm, wet


For Cast Iron Turning

AC4010K / AC4015K

Chipbreaker Selection Guide

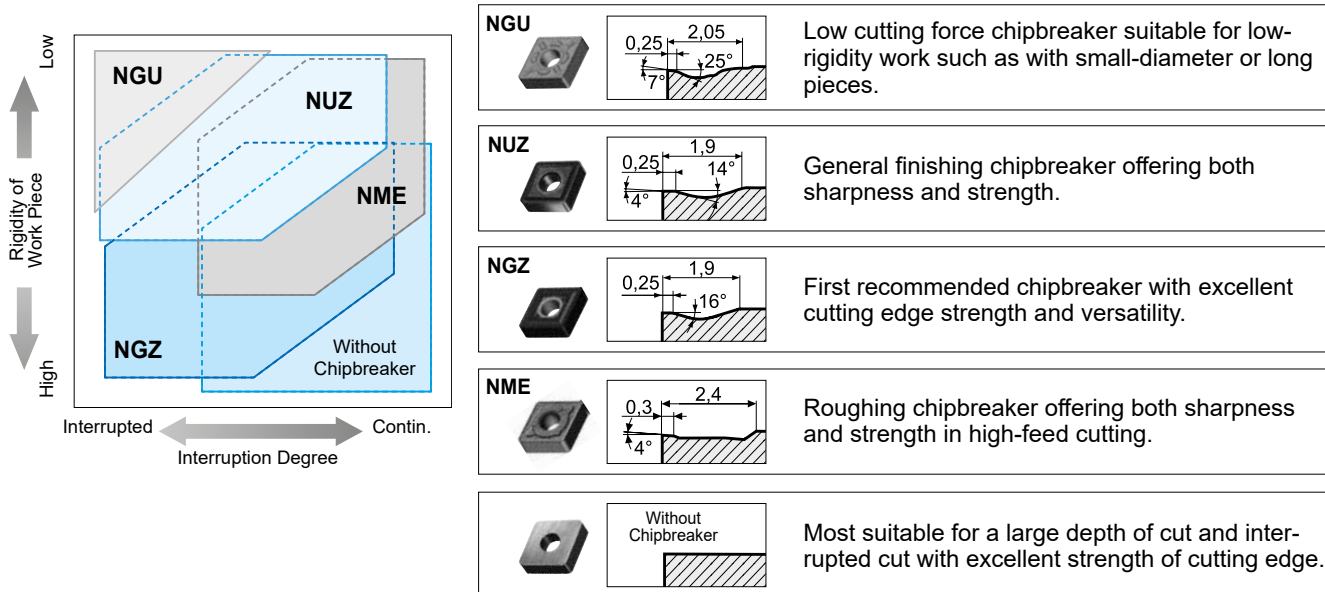

Chipbreaker Application Range

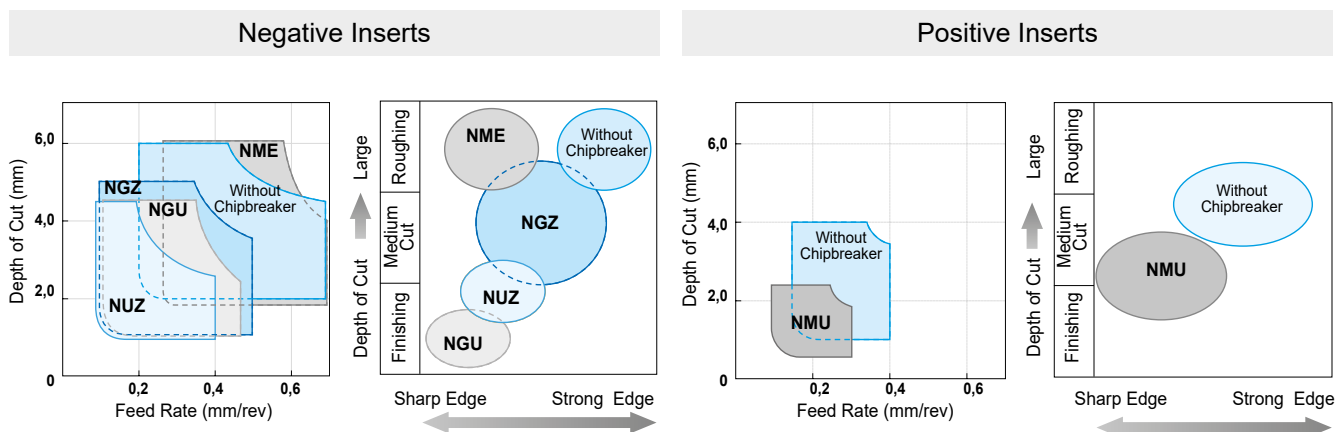

Recommended Cutting Conditions

Min. - Optimum - Max.

Work Material	Cutting Process	Grades	Cutting Conditions		
			Depth of Cut (mm)	Feed Rate (mm/rev)	Cutting Speed (m/min)
Gray Cast Iron (GG-25)	Continuous-General	AC4010K	0,5-2,0-6,0	0,10-0,25-0,40	200-400-700
	Interrupted	AC4015K	0,5-2,0-6,0	0,10-0,30-0,50	180-300-450
	Heavy Interrupted	AC420K	0,5-2,0-6,0	0,10-0,30-0,60	150-200-300
Ductile Cast Iron (GGG-40,3)	Continuous	AC4010K	0,5-2,0-6,0	0,10-0,25-0,40	180-300-450
	General-Interrupted	AC4015K	0,5-2,0-6,0	0,10-0,30-0,50	160-250-400
	Heavy Interrupted	AC420K	0,5-2,0-6,0	0,10-0,30-0,60	120-170-250
High Strength Ductile Cast Iron (GGG-70)	Continuous	AC4010K	0,5-2,0-6,0	0,10-0,25-0,40	160-250-400
	General-Interrupted	AC4015K	0,5-2,0-6,0	0,10-0,30-0,50	140-200-350
	Heavy Interrupted	AC420K	0,5-2,0-6,0	0,10-0,30-0,60	80-150-220

Application Examples

Brake Disc, GG-25 **AC4010K**

AC4010K achieved 1,4 times longer tool life.

Acute angle
Facing of casting skin

Insert: CNMG120408
Cutting Conditions: $v_c = 960$ m/min, $f = 0,75$ mm/rev, $a_p = 2,0$ mm, wet

Brake Disc, GG-25 **AC4015K**

At the same cutting conditions, only the competitor had an exposed substrate.

Obtuse angle
Facing of casting skin

Insert: CNMG120408
Cutting Conditions: $v_c = 960$ m/min, $f = 0,75$ mm/rev, $a_p = 2,0$ mm, wet

Ring, GGG-80 **AC4010K**
AC4015K

Improved wear resistance in high-strength ductile cast iron machining.

Continuous cut

Insert: WNMG080412
Cutting Conditions: $v_c = 120$ m/min, $f = 0,25$ mm/rev, $a_p = 1,0-3,0$ mm, wet

Differential Case, GGG-60 **AC4010K**
AC4015K

Improved chipping resistance and suppressed wear variation during heavy interrupted machining of high-strength ductile cast iron.

Heavy interrupted cut

Insert: WNMG080412
Cutting Conditions: $v_c = 250$ m/min, $f = 0,30-0,45$ mm/rev, $a_p = 2,0$ mm, wet

Gear Case, GGG-50 **AC4010K**
AC4015K

1,2x tool life when combined with NME type chipbreaker for roughing.

Interrupted cut

Insert: CNMG120408
Cutting Conditions: $v_c = 220$ m/min, $f = 0,35$ mm/rev, $a_p = 1,5$ mm, wet

Flywheel, GGG-40,3 **AC4015K**

Minimal wear even after twice the cutting processes thanks to excellent wear resistance.

Continuous cut

Insert: WNMG120408
Cutting Conditions: $v_c = 230$ m/min, $f = 0,3$ mm/rev, $a_p = 2,0$ mm, wet

Stock Items

Negative Type Inserts

80° Diamond Type

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	CNMG 120404 NLUW	●	●	●	12,7	4,76	5,16	0,4
	120408 NLUW	●	●	●				0,8
	120412 NLUW	●	●	●				1,2
	CNMG 090304 NGU	○	○	○	9,525	3,18	3,81	0,4
	090308 NGU	○	○	○				0,8
	CNMG 090412 NGU	○	○	○				1,2
	CNMG 120404 NGU	○	○	○	12,7	4,76	5,16	0,4
	120408 NGU	○	○	○				0,8
	120412 NGU	○	○	○				1,2
	120416 NGU	○	○	○				1,6
	CNMG 160608 NGU	○	○	○	15,875	6,35	6,35	0,8
	160612 NGU	○	○	○				1,2
	160616 NGU	○	○	○				1,6
CNMG 120408 NGUW	●	●	●	0,8				
120412 NGUW	●	●	●	1,2				
CNMG 120408 NME	○	○	○	12,7	4,76	5,16	0,8	
120412 NME	○	○	○				1,2	
120416 NME	○	○	○				1,6	
	CNMG 160608 NME	○	○	○	15,875	6,35	6,35	0,8
	160612 NME	○	○	○				1,2
	160616 NME	○	○	○				1,6
	CNMG 190612 NME	○	○	○	19,05	6,35	7,94	1,2
	190616 NME	○	○	○				1,6
CNMG 250924 NME	○	○	○	25,4	9,52	9,12	2,4	
	CNMG 120404 NUZ	●	●	●	12,7	4,76	5,16	0,4
	120408 NUZ	●	●	●				0,8
	120412 NUZ	●	●	●				1,2
	CNMG 160608 NUZ	●	●	●	15,875	6,35	6,35	0,8
	160612 NUZ	●	●	●				1,2
	160616 NUZ	●	●	●				1,6
	CNMG 190612 NUZ	○	○	○				1,2
	190616 NUZ	○	○	○	1,6			
	CNMG 190612 NUZ	○	○	○	19,05	6,35	7,94	1,2
	190616 NUZ	○	○	○	1,6			
	CNMG 090408 NGZ	○	○	○	9,525	4,76	3,81	0,8
	090412 NGZ	○	○	○				1,2
	CNMG 120404 NGZ	○	○	○				0,4
	CNMG 120408 NGZ	○	○	○	12,7	4,76	5,16	0,8
	120412 NGZ	○	○	○				1,2
	120416 NGZ	○	○	○				1,6
	CNMG 160608 NGZ	○	○	○				0,8
	CNMG 160612 NGZ	○	○	○	15,875	6,35	6,35	1,2
	160616 NGZ	○	○	○				1,6
	CNMG 190612 NGZ	○	○	○				1,2
190616 NGZ	○	○	○	1,6				
	CNMA 120404	○	○	○	12,7	4,76	5,16	0,4
	120408	○	○	○				0,8
	120412	○	○	○				1,2
	120416	○	○	○				1,6
	CNMA 160608	○	○	○	15,875	6,35	6,35	0,8
	160612	○	○	○				1,2
	160616	○	○	○				1,6
	CNMA 190612	○	○	○				1,2
	190616	○	○	○	1,6			

55° Diamond Type

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	DNMG 110404 NGU	○	○	○	9,525	4,76	3,81	0,4
	110408 NGU	○	○	○				0,8
	110412 NGU	○	○	○				1,2
	DNMG 150404 NGU	○	○	○	12,7	4,76	5,16	0,4
	150408 NGU	○	○	○				0,8
	150412 NGU	○	○	○				1,2
	150416 NGU	○	○	○				1,6
DNMG 150604 NGU	○	○	○	12,7	6,35	5,16	0,4	
150608 NGU	○	○	○				0,8	
150612 NGU	○	○	○				1,2	
150616 NGU	○	○	○				1,6	
	DNMG 150408 NME	○	○	○	12,7	4,76	5,16	0,8
	150412 NME	○	○	○				1,2
	150416 NME	○	○	○				1,6
	DNMG 150608 NME	○	○	○	12,7	6,35	5,16	0,8
	150612 NME	○	○	○				1,2
150616 NME	○	○	○	1,6				
	DNMG 150404 NUZ	○	○	○	12,7	4,76	5,16	0,4
	150408 NUZ	○	○	○				0,8
	150412 NUZ	○	○	○				1,2
	DNMG 150608 NUZ	○	○	○	12,7	6,35	5,16	0,8
150612 NUZ	○	○	○	1,2				
150616 NUZ	○	○	○	1,6				

● Euro stock ○ Japan stock

55° Diamond Type

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	DNMG 110408 NGZ	○	○	○	9,525	4,76	3,81	0,8
	110412 NGZ	○	○	○				1,2
	DNMG 150404 NGZ	○	○	○				0,4
	DNMG 150408 NGZ	○	○	○	12,7	4,76	5,16	0,8
	150412 NGZ	○	○	○				1,2
	DNMG 150604 NGZ	○	○	○	12,7	6,35	5,16	0,4
	150608 NGZ	○	○	○				0,8
	150612 NGZ	○	○	○				1,2
	DNMA 150404	○	○	○				0,4
	DNMA 150408	○	○	○	12,7	4,76	5,16	0,8
	150412	○	○	○				1,2
DNMA 150608	○	○	○	1,2				
150612	○	○	○	1,6				

Square Type

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	SNMG 090304 NGU	○	○	○	9,525	3,18	3,81	0,4
	SNMG 090308 NGU	○	○	○				0,8
	SNMG 120404 NGU	○	○	○				0,4
	SNMG 120408 NGU	○	○	○	12,7	4,76	5,16	0,8
	120412 NGU	○	○	○				1,2
	120416 NGU	○	○	○				1,6
	SNMG 150608 NGU	○	○	○				0,8
SNMG 150612 NGU	○	○	○	15,875	6,35	6,35	1,2	
150616 NGU	○	○	○				1,6	
	SNMG 120408 NME	○	○	○	12,7	4,76	5,16	0,8
	120412 NME	○	○	○				1,2
	120416 NME	○	○	○				1,6
	SNMG 150608 NME	○	○	○	15,875	6,35	6,35	0,8
	150612 NME	○	○	○				1,2
	150616 NME	○	○	○				1,6
SNMG 190612 NME	○	○	○	1,2				
SNMG 190616 NME	○	○	○	1,6				
SNMG 250924 NME	○	○	○	25,4	9,52	9,12	2,4	
	SNMG 120408 NUZ	○	○	○	12,7	4,76	5,16	0,8
	120412 NUZ	○	○	○				1,2
	120416 NUZ	○	○	○				1,6
	SNMG 150612 NUZ	○	○	○	15,875	6,35	6,35	1,2
	150616 NUZ	○	○	○				1,6
SNMG 190612 NUZ	○	○	○	19,05	6,38	7,94	1,2	
190616 NUZ	○	○	○	1,6				
	SNMG 120408 NGZ	○	○	○	12,7	4,76	5,16	0,8
	120412 NGZ	○	○	○				1,2
	120416 NGZ	○	○	○				1,6
	SNMG 150612 NGZ	○	○	○				15,875
	SNMG 150616 NGZ	○	○	○	1,6			
	SNMG 190612 NGZ	○	○	○	19,05	6,35	7,94	1,2
	190616 NGZ	○	○	○	1,6			
	SNMA 120404	○	○	○	12,7	4,76	5,16	0,4
	120408	○	○	○				0,8
	120412	○	○	○				1,2
	120416	○	○	○				1,6
	SNMA 150612	○	○	○	15,875	6,35	6,35	1,2
	150616	○	○	○				1,6
	SNMA 190612	○	○	○				1,2
190616	○	○	○	1,6				

Triangular Type

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	TNMG 160404 NGU	○	○	○	9,525	4,76	3,81	0,4
	160408 NGU	○	○	○				0,8
	160412 NGU	○	○	○				1,2
	TNMG 220404 NGU	○	○	○	12,7	4,76	5,16	0,4
	220408 NGU	○	○	○				0,8
	220412 NGU	○	○	○				1,2
	TNMG 160408 NME	○	○	○	9,525	4,76	3,81	0,8
	160412 NME	○	○	○				1,2
	TNMG 220408 NME	○	○	○	12,7	4,76	5,16	0,8
	220412 NME	○	○	○				1,2
220416 NME	○	○	○	1,6				

Triangular Type

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	TNMG 160404 NUZ	○	○	●				0,4
	160408 NUZ	○	○	●				0,8
	160412 NUZ	○	○	●	9,525	4,76	3,81	1,2
	160416 NUZ	○	○	○				1,6
	160420 NUZ	○	○	○				2,0
TNMG	220408 NUZ	○	○	○				0,8
	220412 NUZ	○	○	○	12,7	4,76	5,16	1,2
	220416 NUZ	○	○	○				1,6
	TNMG 160404 NGZ	○	○	○				0,4
	160408 NGZ	●	●	●	9,525	4,76	3,81	0,8
	160412 NGZ	○	○	●				1,2
	TNMG 220408 NGZ	○	○	○				0,8
	220412 NGZ	○	○	○	12,7	4,76	5,16	1,2
220416 NGZ	○	○	○				1,6	
TNMA	160404	○	○	○				0,4
	160408	○	○	○				0,8
	160412	○	○	●	9,525	4,76	3,81	1,2
	160416	○	○	○				1,6
	160420	○	○	○				2,0
	TNMA 220408	○	○	○				0,8
220412	○	○	○	12,7	4,76	5,16	1,2	
220416	○	○	○				1,6	

Square Type (without Insert Hole)

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	SNMN 120408	○	○	○				0,8
	120412	○	○	○	12,7	4,76	-	1,2
	120416	○	○	○				1,6

Triangular Type (without Insert Hole)

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	TNMN 160408	○	○	○				0,8
	160412	○	○	○	9,525	4,76	-	1,2
	160416	○	○	○				1,6

35° Diamond Type

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	VNMG 160404 NGU	○	○	○				0,4
	160408 NGU	○	○	○	9,525	4,76	3,81	0,8
	160412 NGU	○	○	○				1,2
	VNMG 160404 NUZ	○	○	○				0,4
	160408 NUZ	○	○	○	9,525	4,76	3,81	0,8
	160412 NUZ	○	○	○				1,2
	VNMG 160404 NGZ	○	○	○				0,4
	160408 NGZ	●	●	○	9,525	4,76	3,81	0,8
	160412 NGZ	●	○	○				1,2
VNMA	160404	○	○	○				0,4
	160408	○	○	○	9,525	4,76	3,81	0,8
	160412	○	○	○				1,2

Trigon Type

Shape	Cat. No.	Stock			Dimensions (mm)			
		AC4010K	AC4015K	AC420K	Inscribed Circle	Thick-ness	Screw Hole Ø	Nose Radius
	WNMG 080408 NLUW	●	●	○	12,7	4,76	5,16	0,8
	080412 NLUW	●	○	○				1,2
	WNMG 060404 NGU	○	○	○				0,4
	060408 NGU	○	○	○	9,525	4,76	3,81	0,8
	060412 NGU	○	○	○				1,2
	WNMG 080404 NGU	○	○	○				0,4
	080408 NGU	○	○	○	12,7	4,76	5,16	0,8
	080412 NGU	○	○	○				1,2
WNMG 080408 NGUW	●	○	○	12,7	4,76	5,16	0,8	
	WNMG 060408 NME	○	○	○	9,525	4,76	3,81	0,8
	060412 NME	○	○	○				1,2
	WNMG 080408 NME	○	○	○				0,8
	080412 NME	○	○	○	12,7	4,76	5,16	1,2
	080416 NME	○	○	○				1,6
	WNMG 080404 NUZ	○	○	○				0,4
	080408 NUZ	○	○	●	12,7	4,76	5,16	0,8
	080412 NUZ	●	○	○				1,2
	WNMG 060408 NGZ	○	○	●	9,525	4,76	3,81	0,8
	060412 NGZ	○	○	●				1,2
	WNMG 080404 NGZ	○	○	○				0,4
WNMG	080408 NGZ	○	○	●	12,7	4,76	5,16	0,8
	080412 NGZ	○	○	●				1,2
	WNMA 080408	○	○	○				0,8
080412	○	○	○	12,7	4,76	5,16	1,2	
080416	○	○	○				1,6	

● Euro stock ○ Japan stock

80° Diamond Type

Shape	Relief Angle	Cat. No.	Stock			Dimensions (mm)			
			AC4010K	AC4015K	AC420K	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	7°	CCMT 09T304 NLB	●	●		9,525	3,97	4,4	0,4
		09T308 NLB	●	●					0,8
	7°	CCMT 060204 NSU	●	●		6,35	2,38	2,8	0,4
		CCMT 09T304 NSU	●	●		9,525	3,97	4,4	0,4
		09T308 NSU	●	●					0,8
		CCMT 120404 NSU	●	●		12,7	4,76	5,5	0,4
		120408 NSU	●	●				0,8	
	7°	CCMT 120412 NSK	●	●		12,7	4,76	5,5	1,2
	7°	CCMT 09T304 NMU	○	●	●	9,525	3,97	4,4	0,4
		09T308 NMU	●	●	●				0,8
	7°	CCMW 060204	○	○		6,35	2,38	2,8	0,4
		CCMW 09T304	○	○		9,525	3,97	4,4	0,4
		09T308	○	○					0,8
	11°	CPMT 080204 NMU	○	○		7,94	2,38	3,4	0,4
		080208 NMU	○	○					0,8
		CPMT 090304 NMU	○	○		9,525	3,18	4,4	0,4
		090308 NMU	○	○				0,8	
	11°	CPMW 080204	○	○		7,94	2,38	3,4	0,4
		080208	○	○					0,8
		CPMW 090304	○	○		9,525	3,18	4,4	0,4
		090308	○	○				0,8	

55° Diamond Type

	7°	DCMT 070208 NSU	●	●		6,35	2,38	2,8	0,8
		DCMT 11T304 NSU	●	●		9,525	3,97	4,4	0,4
		11T308 NSU	●	●					0,8
	7°	DCMT 11T304 NMU	○	●	●	9,525	3,97	4,4	0,4
		11T308 NMU	●	●	●				0,8
	7°	DCMW 070204	○	○		6,35	2,38	2,8	0,4
		070208	○	○					0,8
		DCMW 11T304	○	○		9,525	3,97	4,4	0,4
		11T308	●	●				0,8	

Round Type

	7°	RCMX 1003M0NRP	○	○		10,0	3,18	3,6	-
		RCMX 1204M0NRP	○	○		12,0	4,76	4,2	-
		RCMX 1606M0NRP	○	○		16,0	6,35	5,2	-

Square Type

	7°	SCMT 09T308 NSU	●	●		9,525	3,97	4,4	0,8
		SCMT 120408 NSU	●	●		12,7	4,76	5,5	0,8
	7°	SCMT 09T308 NMU	○	○	●	9,525	3,97	4,4	0,8
		SCMT 120408 NMU	○	○	●	12,7	4,76	5,5	0,8
	7°	SCMW 09T308	○	○		9,525	3,97	4,4	0,8
		SCMW 120408	○	○					0,8
		120412	○	○		12,7	4,76	5,5	1,2

Triangular Type

Shape	Relief Angle	Cat. No.	Stock			Dimensions (mm)			
			AC4010K	AC4015K	AC420K	Inscribed Circle	Thickness	Screw Hole Ø	Nose Radius
	7°	TCMW 110204	○	○		6,35	2,38	2,8	0,4
		110208	○	○					0,8
		TCMW 16T304	○	○		9,525	3,97	4,3	0,4
		16T308	○	○				0,8	
		16T312	○	○				1,2	
	7°	TCMT 110208 NSU	●	●		6,35	2,38	2,8	0,8
		TCMT 16T308 NSU	●	●		9,525	3,97	4,3	0,8
	7°	TCMT 16T312 NSK	●	●		9,525	3,97	4,3	1,2
	11°	TPMT 110304 NMU	○	○		6,35	3,18	3,4	0,4
		110308 NMU	○	○					0,8
	11°	TPMT 160404 NMU	○	○		9,525	4,76	4,4	0,4
		160408 NMU	○	○					0,8

35° Diamond Type

	5°	VBMT 160404 NSU	●	●		9,525	4,76	4,4	0,4
		160408 NSU	●	●					0,8
	5°	VBMT 160412 NSK	●	●		9,525	4,76	4,4	1,2
	5°	VBMW 160404	○	○		9,525	4,76	4,4	0,4
		160408	○	○					0,8
	7°	VCMT 160404 NSU	●	●		9,525	4,76	4,4	0,4

Square Type (without Insert Hole)

	11°	SPMN 090304	○	○		9,525	3,18	-	0,4
		090308	○	○					0,8
		SPMN 120304	○	○		12,7	3,18	-	0,4
		120308	○	○					0,8
		120312	○	○				1,2	

Triangular Type (without Insert Hole)

	11°	TPMN 110304	○	○		6,35	3,18	-	0,4
		110308	○	○					0,8
		TPMN 160304	○	○		9,525	3,18	-	0,4
		160308	○	○					0,8
		160312	○	○				1,2	

● Euro stock ○ Japan stock



CARBIDE - CBN - DIAMOND

(Germany)
SUMITOMO ELECTRIC Hartmetall GmbH
Konrad-Zuse-Straße 9, 47877 Willich

Tel. +49 2154 4992-0, Fax +49 2154 4992-161
Info@SumitomoTool.com
www.SumitomoTool.com



(UK and Ireland)
SUMITOMO ELECTRIC Hardmetal Ltd.
Summerleys Road, Princes Risborough
Buckinghamshire HP27 9PW, UK

Tel. +44 1844 342081, Fax: +44 1844 342415
SalesUK@sumitomotool.com
www.Sumitomotool.com

